

WISEBOX KIT TC4

4 Channel, 5 Amps / Circuit
Quicklink: Q52DA

General	
IP Rating	IP54
Detection Range	200m
Dimensions	
Depth	80mm
Height	150mm
Width	200mm
Electrical	
Amperage	20A
Maximum Amps / Circuit	5A
Minimum Wattage per Circuit	1W
Voltage	240V

The **Wise Box Version 4 Kit** is an updated version of the original Wise Box Kit. Version 4 features four PIR timer dials for each circuit, allowing up to 16 PIRs to be connected.

The Time Clock Version kit includes a 4 button keyfob, 4 button wall switch and a Time Clock.

The Wisebox unit will control your lights, water features, electric shutters and gates etc. Once programmed, place the indoor wireless switch in a suitable location and the installation is complete. The remote control allows you to enjoy switching your circuits from anywhere in your garden or home.

The WiseBox Kit has a receiver that has four 5 amp circuits with a maximum amperage of 20 amps. The WiseBox kit can achieve up to a 200 metre range with a clear line of sight. These circuits can be changed from switching to an open circuit. Each circuit on the WiseBox is fused individually with a 5 amp fuse to protect all the circuits.

Programming Options

Option 1

Single Button On and Off
Programming this way will create an on and off from a single button on a wireless switch/remote.

Option 2

Dual button On and Off
Programming this way will assign your On and Off to 2 separate buttons.

Option 3

PIR / Timelag function
Programming this way only sends an ON signal, which is then switched off by a pre-set countdown timer. If you program to a PIR, then the PIR will reset itself to the pre-set time every time the sensor is triggered. If programmed to a switch or remote, then the countdown will switch off when it reaches 0 seconds.

Wise Switches / Remotes

The keyfob and the wall switch included within the kit both have four buttons. Once you have programmed the button of your choice to link with a channel, that button will switch

the channel's circuit on / off. You can add additional switches and remotes to a WiseBox if you wish, up to a maximum of 16.

The **Wise Style Time Clock** switch can be programmed to any of our Wise receivers, with a maximum of two receivers per switch. Examples include the Wise Box, Wise Dim Box, Wise Pack Switch Receiver, Wise Switch receiver and any Wise Scene Receiver (if a separate master on and master off is programmed). This product is ideal for use in scenarios where lighting is required to turn on regularly without any user input once set up. A maximum of six commands a day, 7 days a week can be programmed. Alternatively, you can use the built-in functions to control your lighting, such as automatic dusk to dawn mode. Please refer to the instructions located on the Downloads tab for more information.

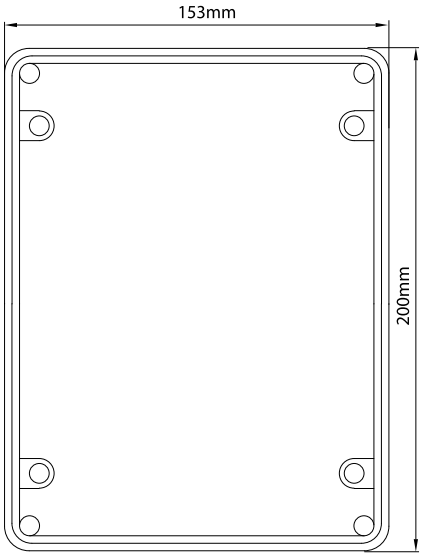
The battery life lasts up to 2 years.

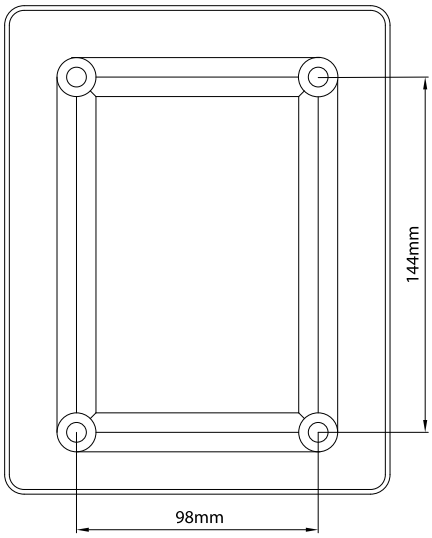
Key Benefits


- The timeclock can control two circuits manually as well as control them automatically once timer functions are set up
- Can set automatic ON when the sun sets and OFF for a specific time e.g. 11 pm
- It allows the possibility of programming 6 commands per day, 7 days a week
- Commands can be automatically programmed for dusk and dawn, every day of the week and random start
- Radio switches require no wiring
- No back box required

Wise Controls Introduction Video




153mm
200mm


144mm
98mm


79mm