


LED Panel Surface Box

LED Panel 24V 600 x 600 mm Surface Silver Box Kit
3000K Warm White 40W



MR. RESISTOR[®]
Lighting Specialist Est. 1968

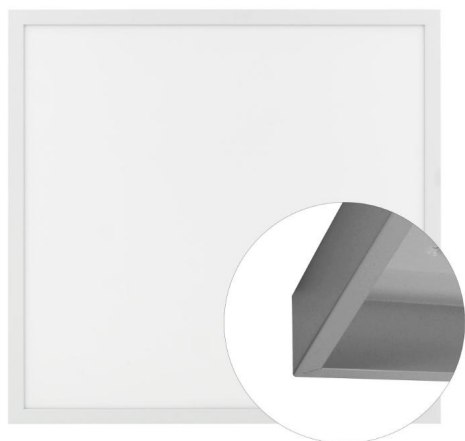

LED PANEL SMS 40W WW

3000K Warm White 40W
Quicklink: Q4156

General

Colour	Silver
Construction	Aluminium
Dimmable	Yes
IP Rating	IP40
Dimmable	Yes
LED Type	SMD2835
Operating Temperature	-20°C - +40°C

Dimensions

Depth	80mm
Length	600mm
Width	600mm

Electrical

Maximum Wattage	40W
Voltage	24V

Light Characteristics

Beam Angle	120°
Colour Rendering Index	80
Colour Temperature	3000K Warm White
Lumens	4400 lm
Lumens Per Watt	110 lm/W

The **LED Panel Light Box** range features the latest in LED technology. The panels are suitable for commercial and domestic applications, included with the LED Panel is a surfaced mounting box for ceilings in which panels can't be recessed into the ceiling. These panels are ideally suited for office lighting and for meeting rooms and corridors. .

Key Features

- IP40 rated
- LED type: SMD2835 160lm/W (110lm/W in the actual fitting)
- Light emitting angle: 120°
- No Flicker
- LM80
- CRI80
- UGR21
- Diffuser plate with light transmittance of 98% (1.5mm thickness)
- Different installations and applications possible