


# LED Panel Surface Box

LED Panel 24V 600 x 600 mm Surface Silver Box Kit  
RGB + 4000K Cool White 36W



**MR. RESISTOR**<sup>®</sup>  
Lighting Specialist Est. 1968

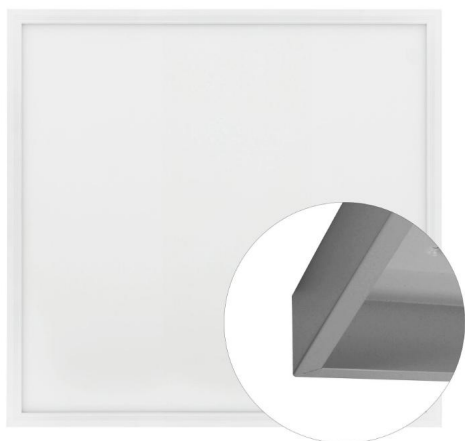

## LED PANEL SMS36W RGBC

RGB + 4000K Cool White 36W  
Quicklink: Q4157

### General

|                       |               |
|-----------------------|---------------|
| Colour                | Silver        |
| Construction          | Aluminium     |
| Dimmable              | Yes           |
| IP Rating             | IP40          |
| Operating Temperature | -20°C - +40°C |

### Dimensions

|        |       |
|--------|-------|
| Depth  | 80mm  |
| Length | 600mm |
| Width  | 600mm |

### Electrical

|                 |        |
|-----------------|--------|
| Maximum Wattage | 36W    |
| Voltage         | 24V DC |

### Light Characteristics

|                        |                  |
|------------------------|------------------|
| Beam Angle             | 210°             |
| Colour Rendering Index | 80               |
| Colour Temperature     | 4000K Cool White |
| Lumens                 | 3600 lm          |
| Lumens Per Watt        | 100 lm/W         |

The **LED Surfaced Panel Light Box** range features the latest in LED technology. The panels are suitable for commercial and domestic applications, included with the LED Panel is a surfaced mounting box for ceilings in which panels can't be recessed into the ceiling. These panels are ideally suited for office lighting and for meeting rooms and corridors.

The RGBW panels are colour change and white, giving the ability to choose either white or any colour or hue. This is ideal for creating different moods and ambiances in a space.

### Key Features

- IP40 rated
- LED type: SMD5050+SMD2835
- Light emitting angle: 120°
- No Flicker
- LM80
- CRI80
- UGR 21
- Diffuser plate with light transmittance of 98% (1.5mm thickness)
- Different installations and applications possible