


Oval LED Extrusion Profile - Suspended Channel

Oval Channel LED Tape Extrusion Profile

Anodised Aluminium 2070mm



MR. RESISTOR®
Lighting Specialist Est. 1968

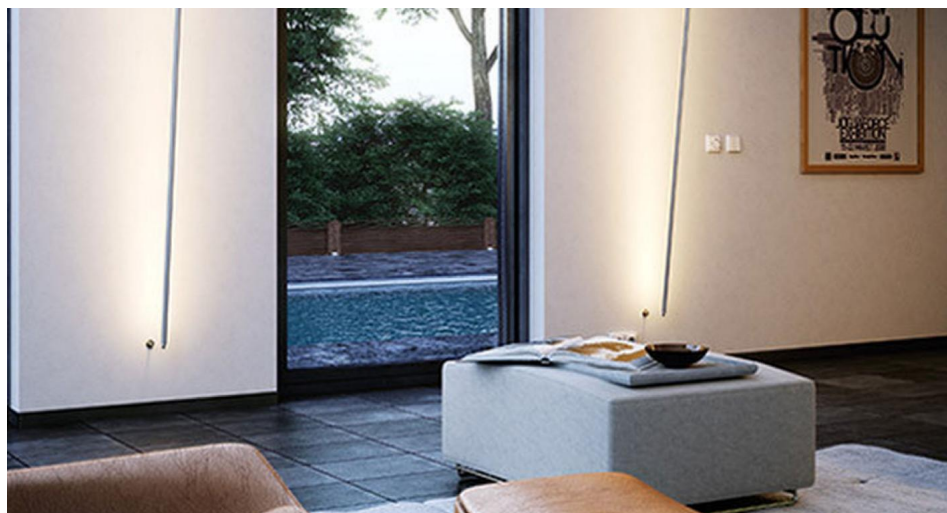

PDSO ANODE 2.07M

Anodised Aluminium 2070mm

Quicklink: Q2FFF

General

Colour	Aluminium
Construction	Aluminium

Dimensions

Depth	15.8mm
Length	2070mm
Width	18.5mm

The **Oval Channel Extrusion Profile** comes in 1m or 2m lengths and is used to house our LED tape, which keeps the tape light safe and out of the way.

Extrusion enables construction of individual lamp designs and suspended fixtures.

- Appealing form
- Small dimensions, lightweight
- Good heat dissipation, environment friendly
- ETL listed and approved for installation in all closet storage areas when factory built by KLUS as fixtures with 4.5w/ft or less
- Designed to reach an IP67 waterproof rating

Parts Required

Extrusions

As many lengths of extrusion can be used as is desired. Any 1m or 2m piece can be positioned end to end with each other to make an unlimited distance.

Endcap

An Endcap is required for each circuit of extrusions being used. It is positioned on the end of the very last extrusion in the circuit and is used to stop dust from and moisture from interfering with the electrical components.

Powerend

An Powerend is required for each circuit of extrusions being used. It is positioned on the very first extrusion in the circuit and serves the same purpose as the Endcap. The powerend has a hole in the centre which allows a cable to be fed through to power the strips.

Diffuser

A diffuser is used to give the light a more even blend. Simply purchase the same amount of diffusers as you did with extrusions.

Will fit any tape with a maximum width of 10mm.

Oval LED Extrusion Profile - Suspended Channel

Oval Channel LED Tape Extrusion Profile

Anodised Aluminium 2070mm



MR. RESISTOR®
Lighting Specialist Est. 1968

This extrusion has been anodized.

