



Phantom Round LED

Phantom Round 40° RGB Outdoor 350mA Slave 1
RGB 3W

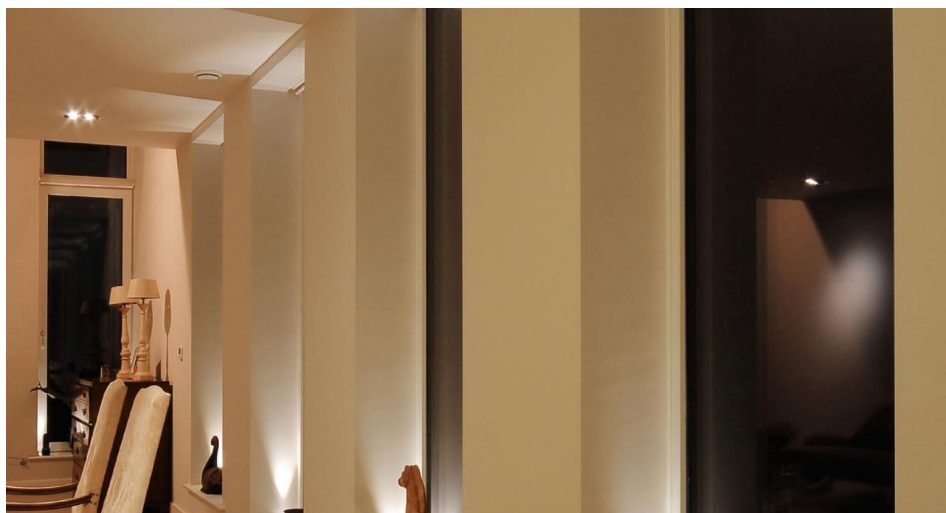

MR. RESISTOR®
Lighting Specialist Est. 1968

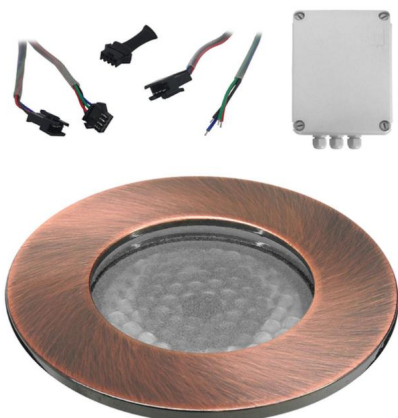

AL2118 RND KIT BS1

RGB 3W

Quicklink: Q30E1

General

| | |
|--------------|---------------|
| Colour | Bronze |
| Construction | Steel / Glass |
| Dimmable | Yes |
| IP Rating | IP68 |

| | |
|----------|------------|
| Dimmable | Yes |
| LED Type | High Power |

Dimensions

| | |
|---------------|-----------------|
| Cable Length | 500mm |
| Cut Out | 40mm (Diameter) |
| Depth | 82mm |
| Diameter | 49mm |
| Tube Diameter | 49mm |
| Tube Length | 88mm |

Electrical

| | |
|-----------------|-------|
| Amperage | 350mA |
| Maximum Wattage | 3W |
| Requires Driver | Yes |

Light Characteristics

| | |
|------------|-----|
| Beam Angle | 40° |
|------------|-----|

The **Phantom Round 40° RGB Outdoor Slave Kit** is used in conjunction with the **Phantom Round 40° RGB Outdoor Master Kits**.

The **Phantom Round 40° RGB** is a small recessed uplight that can be used in floors and walls. It is rated IP68, allowing it to be fitted into wet areas outside such as decking. Constructed from marine grade steel and frosted glass.

The fitting comes complete with spring clips to mount into hollow walls and floors. It also comes with a plastic mounting box for use with brick and other solid surfaces. *Heat Shrink* forms part of the kit to help protect the wiring from water.

This light does not require any wiring as it uses the plug and play system. The power cable and endcap will be needed to be connected to make the light work.