

WISEBOXKITV3RS232

4 Channel, 5 Amps / Circuit
Quicklink: Q579B

General

IP Rating	IP54
Detection Range	200m

Dimensions

Depth	80mm
Height	150mm
Width	200mm

Electrical

Amperage	20A
Maximum Amps / Circuit	5A
Minimum Wattage per Circuit	1W
Voltage	240V

The **Wise Box Version 4 Kit** is an updated version of the original Wise Box Kit. Version 3 features four PIR timer dials for each circuit, allowing up to 16 PIR's to be connected.

The Version 3 kit includes;

1 x Wise Box Version 4

1 x 4 button keyfob

1 x 4 button wall switch

1 x RS232 Interface

1 x RS232 Driver

The Wisebox unit will control your lights, water features, electric shutters and gates etc. Once programmed, place the indoor wireless switch in a suitable location and the installation is complete. Enjoy switching your circuits from anywhere in your garden or home with the remote control.

The WiseBox Kit has a receiver that has four 5 amp circuits with a maximum amperage of 20 amps. The WiseBox kit can achieve up to a 200 metre range with a clear line of sight. These circuits can be changed from switching to an open circuit. Each circuit on the WiseBox is fused individually with a 5 amp fuse to protect all the circuits.

Programming Options

Option 1

Single Button On and Off
Programming this way will create an on and off from a single button on a wireless switch / remote.

Option 2

Dual button On and Off
Programming this way will assign your On and Off to 2 separate buttons.

Option 3

PIR / Timelag function
Programming this way only sends an ON signal, which is then switched off by a pre-set

countdown timer. If you program to a PIR, then the PIR will reset itself to the pre-set time every time the sensor is triggered. If programmed to a switch or remote, then the countdown will switch off when it reaches 0 seconds.

Wise Switches / Remotes

The keyfob and the wall switch included within the kit both have four buttons. Once you have programmed the button of your choice to link with a channel, that button will switch the channels circuit on / off. You can add additional switches and remotes to a WiseBox if you wish, up to a maximum of 16.

The **Wise RS232 Interface** is used as a way of communicating between the wise controls system and other AV equipment.

Works with:

- Wise Recievers
- Control 4
- Creston
- Lutron
- Mode
- RTI

Software drivers are available from Janus Technology. Please go to the link below to download them

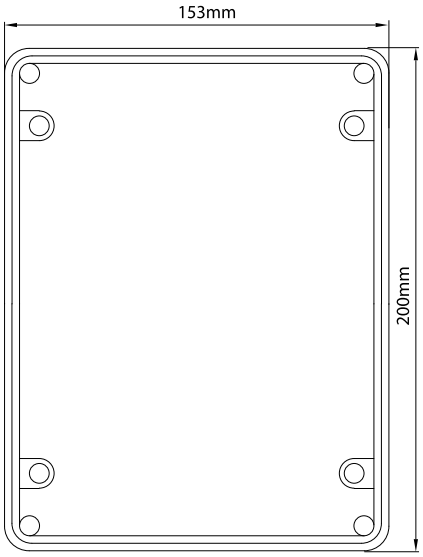
http://janustechnology.co.uk/product-category/drivers/manufacturer/drivers-manufacturer-wise-controls/

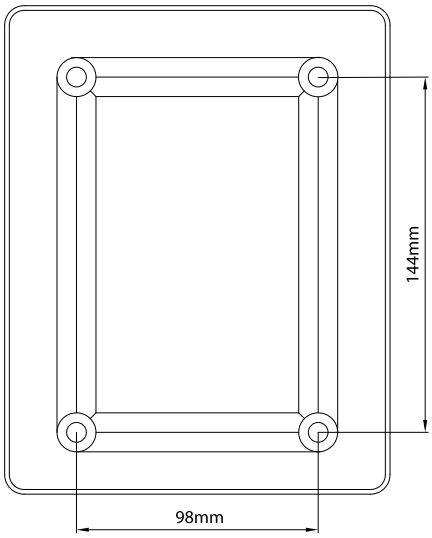
Wise Controls Introduction Video




WiseBox Programming




153mm
200mm


144mm
98mm


79mm