


Wireless ID Switches

Wise ID Switch
Antique Bronze 42 Channel

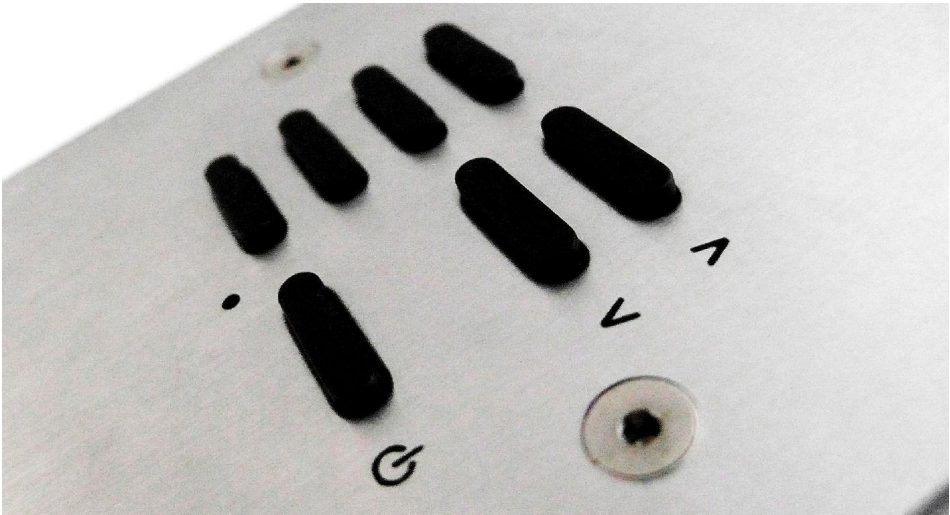

WISEIDDSW42 BMA

Antique Bronze 42 Channel
Quicklink: Q661C

General

Colour	Antique Bronze
Construction	Steel
IP Rating	IP20

Operating Temperature	-10°C ~ +55°C
Radio Frequency	868.3 MHz

Dimensions

Height	86mm
Plate Depth	1.5mm
Width	86mm

Electrical

Replacement Battery	CR2430
Voltage	3V

The 42 channel **Wise ID Switches** can be programmed to any of the channels on the Wise receivers. There is no need for two way wiring as you can add another radio switch and place it where you like. You can program these switches to switch more than one Wise receiver.

The 42 channel switch can be used as a scene setting switch, a colour changing control switch, or as a regular switch able to control up to 42 independent circuits. This switch is compatible with every receiver within the Wise Controls range.

This switch incorporates six different menus for navigation, with each menu controlling seven separate circuits (6x7).

The battery life lasts up to five years.

Wise Controls Introduction Video

