


LED Tape 100 RGB 8W 24V

Waterproof LED Tape RGB IP65 165mm (5xSMD 5050 LEDs) 24V
1.3W 165mm



MR. RESISTOR®
Lighting Specialist Est. 1968

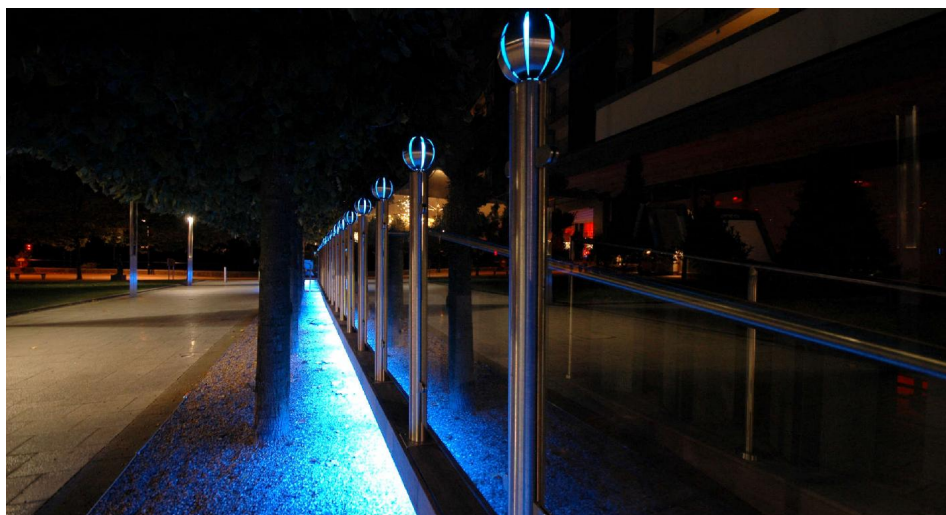

TAPE16WP RGB

1.3W 165mm

Quicklink: Q2CC6

General

| | |
|--------------|---------|
| Construction | Plastic |
| IP Rating | IP65 |

| | |
|--------------------|----------|
| LED Chip | SMD 5050 |
| LED per Tape | 5 |
| Maximum Connection | 10m |

Dimensions

| | |
|--------|-------|
| Height | 5mm |
| Length | 165mm |
| Width | 15mm |

Electrical

| | |
|-----------------|-------|
| Maximum Wattage | 1.32W |
| Voltage | 24V |

Light Characteristics

| | |
|-----------------|-------|
| Beam Angle | 120° |
| Watts Per Metre | 8 W/m |

LED Tape is a versatile light source with a wide range of uses that can be either decorative or functional. Easy to install with pre-fitted double-sided backing tape and can be cut to a specific length.

Anything from a short linear run of light for under cabinet or plinth lighting, shelving or back lighting mirrors to large scale applications such as low level lighting in corridors, dropped ceilings, cove lighting, doorways, handrails and staircases can be achieved. A wide range of extrusions and diffusers are available to suit any location and produce different effects. For example a continuous, seamless line of light can be created when mounted in Maxi extrusions combined with Liger diffusers.

To achieve IP65 the tape must be sealed using heat shrink sleeving on the joints making it suitable for bathrooms and kitchens.

Each tape is 165mm and can be connected to another strip via pins. Up to 10 strips can be connected together.

This LED tape is dimmable and we recommend using the Triac LED Dimming Driver. Ensure the dimming driver you use exceeds the total wattage of the LED Tape.