



**MR. RESISTOR®**

Lighting Specialist Est. 1968

Downlights





Rock 'n' Roll 50  
recessed low voltage downlight

- This downlight has a 35° vertical tilt and full 360° rotation for precise beam direction.
- A special pull down function in this fitting makes bulb replacement quick and easy.

Lampholder	GU 5.3
Max Wattage	50W
Voltage	12V
IP Rating	IP20
Ceiling Cutout	80mm
Overall Diameter	90mm
Ceiling Depth	68mm
Vertical Tilt	35°
Horizontal Rotation	360°

Accessories

M249 constant	14° 50W 12V Lamp
M250 constant	27° 50W 12V Lamp
M258 constant	40° 50W 12V Lamp
M280 constant	55° 50W 12V Lamp
ET4632 SP PRE	60W 12V Transformer
03204 (DLC4)	Firehood 1 hour rated



Available Finishes

- white (DL336 WHITE)
- black (DL336 BLACK)
- chrome (DL336 CHROME)
- bronze (DL336 BRONZE)
- brass (DL336 BRASS)
- nickel (DL336 NICKEL)



Rock 'n' Roll 35  
recessed low voltage downlight

- This downlight has a 35° vertical tilt and full 360° rotation for precise beam direction.
- A special pull down function in this fitting makes bulb replacement quick and easy.

Lampholder	GU 4
Max Wattage	35W
Voltage	12V
IP Rating	IP20
Ceiling Cutout	65mm
Overall Diameter	75mm
Ceiling Depth	66mm
Vertical Tilt	35°
Horizontal Rotation	360°

Accessories

M266B (M223)	38° 35W 12V lamp
M265B	8° 35W 12V lamp
ET4632 SP PRE	60W 12V Transformer
03204 (DLC4)	Firehood 1 hour rated



Available Finishes

- white (DL308 WHITE)
- black (DL308 BLACK)
- chrome (DL308 CHROME)
- bronze (DL308 BRONZE)
- brass (DL308 BRASS)
- nickel (DL308 NICKEL)



Black Baffle 50  
recessed low voltage downlight

- This downlight has a 35° vertical tilt and full 360° rotation for precise beam direction.
- A special pull down function in this fitting makes bulb replacement quick and easy.
- This fitting has a black baffle to reduce glare and provide a soft light.

Lampholder	GU 5.3
Max Wattage	50W
Voltage	12V
IP Rating	IP20
Ceiling Cutout	80mm
Overall Diameter	90mm
Ceiling Depth	85mm
Vertical Tilt	35°
Horizontal Rotation	360°

Accessories

M249 constant	14° 50W 12V Lamp
M250 constant	27° 50W 12V Lamp
M258 constant	40° 50W 12V Lamp
M280 constant	55° 50W 12V Lamp
ET4632 SP PRE	60W 12V Transformer
03204 (DLC4)	Firehood 1 hour rated



Available Finishes

- white (DL33614 WHITE)
- black (DL33644 BLACK)
- chrome (DL33624 CHROME)
- bronze (DL33654 BRONZE)
- brass (DL33634 BRASS)
- nickel (DL33664 NICKEL)



Black Baffle 35  
recessed low voltage downlight

- This downlight has a 35° vertical tilt and full 360° rotation for precise beam direction.
- A special pull down function in this fitting makes bulb replacement quick and easy.
- This fitting has a black baffle to reduce glare and provide a soft light.

Lampholder	GU4
Max Wattage	35W
Voltage	12V
IP Rating	IP20
Ceiling Cutout	65mm
Overall Diameter	75mm
Ceiling Depth	85mm
Vertical Tilt	35°
Horizontal Rotation	360°

Accessories

M266B (M223)	38° 35W 12V lamp
M265B	8° 35W 12V lamp
ET4632 SP PRE	60W 12V Transformer
03204 (DLC4)	Firehood 1 hour rated



Available Finishes

- white (DL30814 WHITE)
- black (DL30844 BLACK)
- chrome (DL30824 CHROME)
- bronze (DL30854 BRONZE)
- brass (DL30834 BRASS)
- nickel (DL30864 NICKEL)



Chrome Baffle 50  
recessed low voltage downlight

- This downlight has a 35° vertical tilt and full 360° rotation for precise beam direction.
- A special pull down function in this fitting makes bulb replacement quick and easy.
- This fitting has a chrome baffle to reduce glare and provide a soft light.

Lampholder	GU 5.3
Max Wattage	50W
Voltage	12V
IP Rating	IP20
Ceiling Cutout	80mm
Overall Diameter	90mm
Ceiling Depth	85mm
Vertical Tilt	35°
Horizontal Rotation	360°

Accessories

M249 constant	14° 50W 12V Lamp
M250 constant	27° 50W 12V Lamp
M258 constant	40° 50W 12V Lamp
M280 constant	55° 50W 12V Lamp
ET4632 SP PRE	60W 12V Transformer
03204 (DLC4)	Firehood 1 hour rated



Available Finishes

- white (DL33612 WHITE)
- chrome (DL33622 CHROME)



Chrome Baffle 35  
recessed low voltage downlight

- This downlight has a 35° vertical tilt and full 360° rotation for precise beam direction.
- A special pull down function in this fitting makes bulb replacement quick and easy.
- This fitting has a chrome baffle to reduce glare and provide a soft light.

Lampholder	GU4
Max Wattage	35W
Voltage	12V
IP Rating	IP20
Ceiling Cutout	65mm
Overall Diameter	75mm
Ceiling Depth	85mm
Vertical Tilt	35°
Horizontal Rotation	360°

Accessories

M266B (M223)	38° 35W 12V lamp
M265B	8° 35W 12V lamp
ET4632 SP PRE	60W 12V Transformer
03204 (DLC4)	Firehood 1 hour rated



Available Finishes

- white (DL30812 WHITE)
- chrome (DL30822 CHROME)







Glare Bar 111  
recessed low voltage downlight

- this Anti Glare, downlights ideal for situations where it is important that the source isn't seen.
- When used with an AR111bar lamp this fitting will create dramatic effects whether highlighting a flower on a table to floodlighting a feature wall.

Lampholder	G53
Max Wattage	50W
Voltage	12V
IP Rating	IP20
Ceiling Cut Out	175mm
Overall Diameter	186mm
Ceiling Depth	116mm
Vertical Tilt	30°

Accessories

M161 GE	AR111 Bar Lamp (G53) 50W 24°
M161 45D	AR111 Bar Lamp (G53) 50W 8°
ET4632 SP PRE	AR111 Bar Lamp (G53) 45W 8°
03204 (DLC4)	60W 12V Transformer Firehood 1 hour rated



Available Finishes

- white (DH2757 WHITE)
- nickel (DH2757 NICKEL)
- chrome (DH2757 CHROME)



Glare Bar 70  
recessed low voltage downlight

- this Anti Glare, downlights ideal for situations where it is important that the source isn't seen.
- When used with an AR111bar lamp this fitting will create dramatic effects whether highlighting a flower on a table to floodlighting a feature wall.

Lampholder	B15
Max Wattage	50W
Voltage	12V
IP Rating	IP20
Ceiling Cutout	143mm
Overall Diameter	152mm
Ceiling Depth	115mm
Vertical Tilt	30°

Accessories

M158 OS	AR70 Bar Lamp (SBC)
M157 OS	50W 24° 408 50W
ET4632 SP PRE	60W 12V Transformer
03204 (DLC4)	Firehood 1 hour rated



Available Finishes

- white (DH2859 WHITE)
- nickel (DH2859 NICKEL)
- chrome (DH2859 CHROME)



Elegant LCD2009  
recessed low voltage downlight

- The 50mm Tilting Downlight holds a 50mm GU5.3 lamp. The downlight uses a spring retention system for easy installation and lamp changing.
- The light can be adjusted by up to 35° for directional lighting and a black Baffle reduces direct glare, giving a softer light.

Lampholder	GU5.3
Max Wattage	50W
Voltage	12V
IP Rating	IP41
Ceiling Cutout	65mm
Fitting Diameter	72mm
Fitting Depth	95mm
Vertical Tilt	35°

Accessories

M249 constant	14° 50W 12V Lamp
M250 constant	27° 50W 12V Lamp
M258 constant	40° 50W 12V Lamp
M280 constant	55° 50W 12V Lamp
ET4632	60W 12V Transformer
03204 (DLC4)	Firehood 1 hour rated



Available Finishes

- white (LCD2009 802)
- black (LCD2009 803)
- polished nickel (LCD2009 301)
- satin chrome (LCD2009 202)
- chrome (LCD2009 201)
- bronze (LCD2009 500)



Elegant LCD2008  
recessed low voltage downlight

- The 35mm Tilting Downlight holds a 35mm GU4 lamp. The downlight uses a spring retention system for easy installation and lamp changing.
- The light can be adjusted by up to 35° for directional lighting and a black Baffle reduces direct glare, giving a softer light.

Lampholder	GU4
Max Wattage	35W
Voltage	12V
IP Rating	IP41
Ceiling Cutout	50mm
Fitting Diameter	60mm
Fitting Depth	95mm
Vertical Tilt	35°

Accessories

M266B (M223)	38° 35W 12V lamp
M265B	8° 35W 12V lamp
ET4632 SP	60W 12V Transformer
03204 (DLC4)	Firehood 1 hour rated



Available Finishes

- white (LCD2008 802)
- black (LCD2008 803)
- polished nickel (LCD2008 301)
- satin chrome (LCD2008 202)
- chrome (LCD2008 201)
- bronze (LCD2008 500)



Elegant LCD2005  
recessed low voltage downlight

- This 50mm Fixed GU5.3 Downlight holds a 50mm lamp and incorporates a spring retention system for easy installation and lamp changing.
- Black Baffle reduces direct glare, giving a softer light.

Lampholder	GU5.3
Max Wattage	50W
Voltage	12V
IP Rating	IP41
Ceiling Cutout	62mm
Fitting Diameter	72mm
Fitting Depth	95mm

Accessories

M249 constant	14° 50W 12V Lamp
M250 constant	27° 50W 12V Lamp
M258 constant	40° 50W 12V Lamp
M280 constant	55° 50W 12V Lamp
ET4632 SP PRE	60W 12V Transformer
03204 (DLC4)	Firehood 1 hour rated



Available Finishes

- white (LCD2005 802)
- black (LCD2005 803)
- polished nickel (LCD2005 301)
- satin chrome (LCD2005 202)
- chrome (LCD2005 201)
- bronze (LCD2005 500)



Elegant LCD2004  
recessed low voltage downlight

- This 50mm Fixed GU4 Downlight holds a 35mm lamp and incorporates a spring retention system for easy installation and lamp changing.
- Black Baffle reduces direct glare, giving a softer light.

Lampholder	GU4
Maximum Wattage	35W
Voltage	12V
IP Rating	IP41
Ceiling Cutout	50mm
Fitting Diameter	60mm
Fitting Depth	95mm

Accessories

M266B (M223)	38° 35W 12V lamp
M265G	8° 35W 12V lamp
ET4632 SP PRE	60W 12V Transformer
03204 (DLC4)	Firehood 1 hour rated



Available Finishes

- white (LCD2004 802)
- black (LCD2004 803)
- polished nickel (LCD2004 301)
- satin chrome (LCD2004 202)
- chrome (LCD2004 201)
- bronze (LCD2004 500)



Elegant LCD2035  
recessed low voltage downlight

- This 50mm Adjustable GU5.3 Downlight holds a 50mm lamp and incorporates a spring retention system for easy installation and lamp changing.
- Black Baffle reduces direct glare, giving a softer light.
- The light can be tilted up to a 25° and rotated 360° for full directional lighting.

Lampholder	GU5.3
Maximum Wattage	50W
Voltage	12V
IP Rating	IP41
Ceiling Cutout	75mm
Fitting Diameter	88mm
Fitting Depth	95mm
Horizontal Rotation	360°
Vertical Tilt	25°

Accessories

M249 constant	14° 50W 12V Lamp
M250 constant	27° 50W 12V Lamp
M258 constant	40° 50W 12V Lamp
M280 constant	55° 50W 12V Lamp
ET4632 SP PRE	60W 12V Transformer
03204 (DLC4)	Firehood 1 hour rated



Available Finishes

- white (LCD2035 802)
- black (LCD2035 803)
- polished nickel (LCD2035 301)
- satin chrome (LCD2035 202)
- chrome (LCD2035 201)
- bronze (LCD2035 500)



Elegant LCD2033  
recessed low voltage downlight

- This 35mm Adjustable GU4 Downlight holds a 35mm lamp and incorporates a spring retention system for easy installation and lamp changing.
- Black Baffle reduces direct glare, giving a softer light.
- The light can be tilted up to a 25° and rotated 360° for full directional lighting.

Lampholder	GU4
Max Wattage	35W
Voltage	12V
IP Rating	IP41
Ceiling Cutout	60mm
Fitting Diameter	75mm
Fitting Depth	95mm
Horizontal Rotation	360°
Vertical Tilt	25°

Accessories

M266B (M223)	38° 35W 12V lamp
M265G	8° 35W 12V lamp
ET4632 SP PRE	60W 12V Transformer
03204 (DLC4)	Firehood 1 hour rated



Available Finishes

- white (LCD2033 802)
- black (LCD2033 803)
- polished nickel (LCD2033 301)
- satin chrome (LCD2033 202)
- chrome (LCD2033 201)
- bronze (LCD2033 500)





Invisible Adjustable Pinhole  
recessed low voltage downlight

- The Invisible range is mounted flush to the ceiling for a contemporary look.
- It's black baffle helps to cut down distracting lamp glare.
- This adjustable fitting has a 25° vertical tilt that allows its light to be directed where desired.

Lampholder	GU 5.3
Max Wattage	50W
Voltage	12V
IP Rating	IP20
Ceiling Cutout	72mm
Overall Diameter	90mm
Ceiling Depth	105mm
Vertical Tilt	20°

Accessories

M249 constant	14° 50W 12V Lamp
M250 constant	27° 50W 12V Lamp
M258 constant	40° 50W 12V Lamp
M280 constant	55° 50W 12V Lamp
CPR 78	Plaster Ring Round
ET4632	60W 12V Transformer
03204 (DLC4)	Firehood 1 hour rated



Available Finishes



Invisible Adjustable Pinhole Mini  
recessed low voltage downlight

- The Invisible range is mounted flush to the ceiling for a contemporary look.
- It's black baffle helps to cut down distracting lamp glare.
- This adjustable fitting has a 25° vertical tilt that allows its light to be directed where desired.

Lampholder	GU4
Max Wattage	35W
Voltage	12V
IP Rating	IP20
Ceiling Cutout	50mm
Overall Diameter	65mm
Ceiling Depth	95mm
Vertical Tilt	25°

Accessories

M266B (M223)	38° 35W 12V lamp
M265G	8° 35W 12V lamp
CPR 54	Plaster Ring Round
ET4632	60W 12V Transformer
03204 (DLC4)	Firehood 1 hour rated



Available Finishes



Invisible Fixed Pinhole  
recessed low voltage downlight

- The Invisible range is mounted flush to the ceiling for a contemporary look.
- It's black baffle helps to cut down distracting lamp glare.
- This adjustable fitting has a 25° vertical tilt that allows its light to be directed where desired.

Lampholder	GU 5.3
Max Wattage	50W
Voltage	12V
IP Rating	IP20
Ceiling Cutout	72mm
Overall Diameter	90mm
Ceiling Depth	105mm

Accessories

M249 constant	14° 50W 12V Lamp
M250 constant	27° 50W 12V Lamp
M258 constant	40° 50W 12V Lamp
M280 constant	55° 50W 12V Lamp
CPR 78	Plaster Ring Round
ET4632	60W 12V Transformer
03204 (DLC4)	Firehood 1 hour rated



Available Finishes



Invisible Fixed Pinhole Mini  
recessed low voltage downlight

- The Invisible range is mounted flush to the ceiling for a contemporary look.
- It's black baffle helps to cut down distracting lamp glare.
- This adjustable fitting has a 25° vertical tilt that allows its light to be directed where desired.

Lampholder	GU4
Max Wattage	35W
Voltage	12V
IP Rating	IP20
Ceiling Cutout	50mm
Overall Diameter	65mm
Ceiling Depth	95mm

Accessories

M266B (M223)	38° 35W 12V lamp
M265G	8° 35W 12V lamp
CPR 54	Plaster Ring Round
ET4632	60W 12V Transformer
03204 (DLC4)	Firehood 1 hour rated



Available Finishes



Invisible Camera Spot White  
recessed low voltage downlight

- The invisible camera spot is a low profile fitting that fits discretely into the ceiling.
- It has a black baffle to cut down on lamp glare.
- An optional plaster in ring available for flush mounting in the ceiling.

Lampholder	GU5.3
Max Wattage	50W
Voltage	12V
IP Rating	IP20
Ceiling Cutout	72mm
Overall Diameter	90mm
Ceiling Depth	105mm
Vertical Tilt	45°

Accessories

M249 constant	14° 50W 12V Lamp
M250 constant	27° 50W 12V Lamp
M258 constant	40° 50W 12V Lamp
M280 constant	55° 50W 12V Lamp
TPR RD 3001	Plaster Ring Round
ET4632	60W 12V Transformer
03204 (DLC4)	Firehood 1 hour rated



Available Finishes



Invisible Camera Spot Mini White  
recessed low voltage downlight

- The invisible camera spot is a low profile fitting that fits discretely into the ceiling.
- It has a black baffle to cut down on lamp glare.
- An optional plaster in ring available for flush mounting in the ceiling.

Lampholder	GU4
Max Wattage	35W
Voltage	12V
IP Rating	IP20
Ceiling Cutout	50mm
Overall Diameter	65mm
Ceiling Depth	95mm
Vertical Tilt	45°

Accessories

M266B (M223)	38° 35W 12V lamp
M265G	8° 35W 12V lamp
TPR RD 2501	Plaster Ring Round
ET4632	60W 12V Transformer
03204 (DLC4)	Firehood 1 hour rated



Available Finishes





**Invisible Adjustable Pinhole Square**  
recessed low voltage downlight

- The Invisible range is mounted flush to the ceiling for a contemporary look.
- It's black baffle helps to cut down distracting lamp glare.
- This adjustable fitting has a 25° vertical tilt that allows its light to be directed where desired.

Lampholder	GU 5.3
Max Wattage	50W
Voltage	12V
IP Rating	IP20
Ceiling Cutout	72mm
Width	90mm
Length	90mm
Ceiling Depth	105mm
Vertical Tilt	25°

Accessories

M249 constant	14° 50W 12V Lamp
M250 constant	27° 50W 12V Lamp
M258 constant	40° 50W 12V Lamp
M280 constant	55° 50W 12V Lamp
CPR 78	Plaster Ring
ET4632.SP PRE	60W 12V Transformer
03204 (DLC4)	Firehood 1 hour rated



Available Finishes

- white (DLPASQ3001 WHITE)
- nickel (DLPASQ3001 NKL)
- chrome (DLPASQ3001 CHR)
- bronze (DLPASQ3001 BRZ)
- black (DLPASQ3001 BLK)



**Invisible Adjustable Pinhole Mini Square**  
recessed low voltage downlight

- The Invisible range is mounted flush to the ceiling for a contemporary look.
- It's black baffle helps to cut down distracting lamp glare.
- This adjustable fitting has a 25° vertical tilt that allows its light to be directed where desired.

Lampholder	GU4
Max Wattage	35W
Voltage	12V
IP Rating	IP20
Ceiling Cutout	50mm
Ceiling Depth	95mm
Width	64mm
Length	64mm
Vertical Tilt	25°

Accessories

M266B (M223)	38° 35W 12V lamp
M265B	8° 35W 12V lamp
CPR 54	Plaster Ring
ET4632.SP PRE	60W 12V Transformer
03204 (DLC4)	Firehood 1 hour rated



Available Finishes

- white (DLPASQ2501 WHITE)
- nickel (DLPASQ2501 NKL)
- chrome (DLPASQ2501 CHR)
- bronze (DLPASQ2501 BRZ)
- black (DLPASQ2501 BLK)



**Invisible Fixed Pinhole Square**  
recessed low voltage downlight

- The Invisible range is mounted flush to the ceiling for a contemporary look.
- It's black baffle helps to cut down distracting lamp glare.
- Has a very small aperture creating a dramatic vertical beam.

Lampholder	GU 5.3
Max Wattage	50W
Voltage	12V
IP Rating	IP20
Ceiling Cutout	72mm
Ceiling Depth	105mm
Width	90mm
Length	90mm

Accessories

M249 constant	14° 50W 12V Lamp
M250 constant	27° 50W 12V Lamp
M258 constant	40° 50W 12V Lamp
M280 constant	55° 50W 12V Lamp
CPR 78	Plaster Ring
ET4632.SP PRE	60W 12V Transformer
03204 (DLC4)	Firehood 1 hour rated



Available Finishes

- white (DLPSQ3001 WHITE)
- nickel (DLPSQ3001 NKL)
- chrome (DLPSQ3001 CHR)
- bronze (DLPSQ3001 BRZ)
- black (DLPSQ3001 BLK)



**Invisible Fixed Pinhole Mini Square**  
recessed low voltage downlight

- The Invisible range is mounted flush to the ceiling for a contemporary look.
- It's black baffle helps to cut down distracting lamp glare.
- Has a very small aperture creating a dramatic vertical beam.

Lampholder	GU4
Max Wattage	35W
Voltage	12V
IP Rating	IP20
Ceiling Cutout	50mm
Ceiling Depth	95mm
Width	64mm
Length	64mm

Accessories

M266B (M223)	38° 35W 12V lamp
M265B	8° 35W 12V lamp
CPR 54	Plaster Ring
ET4632.SP PRE	60W 12V Transformer
03204 (DLC4)	Firehood 1 hour rated



Available Finishes

- white (DLPSQ2501 WHITE)
- nickel (DLPSQ2501 NKL)
- chrome (DLPSQ2501 CHR)
- bronze (DLPSQ2501 BRZ)
- black (DLPSQ2501 BLK)



**Invisible Adjustable Pinhole Double Square**  
recessed low voltage downlight

- The Invisible range is mounted flush to the ceiling for a contemporary look.
- It's black baffle helps to cut down distracting lamp glare.
- Double fixture, giving two adjustable lights.

Lampholder	GU 5.3
Max Wattage	100W
Voltage	12V
IP Rating	IP20
Ceiling Cut Out	2 x 78mm
Ceiling Depth	105mm
Width	105mm
Length	180mm
Vertical Tilt	25°

Accessories

M249 constant	14° 50W 12V Lamp
M250 constant	27° 50W 12V Lamp
M258 constant	40° 50W 12V Lamp
M280 constant	55° 50W 12V Lamp
ET4632.SP PRE	60W 12V Transformer
03204 (DLC4)	Firehood 1 hour rated



Available Finishes

- white (DLPASQ23001 WH)
- nickel (DLPASQ23001 NK)
- chrome (DLPASQ23001 CH)
- bronze (DLPASQ23001 BRZ)
- black (DLPASQ23001 BLK)



**Invisible Adjustable Pinhole Mini Double Square**  
recessed low voltage downlight

- The Invisible range is mounted flush to the ceiling for a contemporary look.
- It's black baffle helps to cut down distracting lamp glare.
- Double fixture, giving two adjustable lights.

Lampholder	GU4
Max Wattage	70W
Voltage	12V
IP Rating	IP20
Ceiling Cut Out	115mm
Ceiling Depth	100mm
Depth	127mm
Length	92mm
Vertical Tilt	25°

Accessories

M266B (M223)	38° 35W 12V lamp
M265B	8° 35W 12V lamp
ET4632.SP PRE	60W 12V Transformer
03204 (DLC4)	Firehood 1 hour rated



Available Finishes

- white (DLPASQ22501 WH)
- nickel (DLPASQ22501 NK)
- chrome (DLPASQ22501 CH)
- bronze (DLPASQ22501 BRZ)
- black (DLPASQ22501 BLK)



**Invisible Adjustable Pinhole Quad Square**  
recessed low voltage downlight

- The Invisible range is mounted flush to the ceiling for a contemporary look.
- It's black baffle helps to cut down distracting lamp glare.
- Quad fixture, giving four adjustable lights.

Lampholder	GU5.3
Max Wattage	200W
Voltage	12V
IP Rating	IP20
Ceiling Cut Out	160mm x 160mm
Width	105mm
Length	105mm
Vertical Tilt	25°

Accessories

M249 constant	14° 50W 12V Lamp
M250 constant	27° 50W 12V Lamp
M258 constant	40° 50W 12V Lamp
M280 constant	55° 50W 12V Lamp
ET4632.SP PRE	60W 12V Transformer
03204 (DLC4)	Firehood 1 hour rated



Available Finishes

- white (DLPASQ43001 WH)
- nickel (DLPASQ43001 NK)
- chrome (DLPASQ43001 CH)
- bronze (DLPASQ43001 BRZ)
- black (DLPASQ43001 BLK)







Contract 50/B  
recessed low voltage downlight

- The Contract 50/B is a fixed downlight with no visible lamp retainer
- It contains a twisting lock ring for easy lamp changing.

Lampholder	GU5.3
Max Wattage	50W
Voltage	12V
IP Rating	IP20
Ceiling Cutout	67mm
Overall Diameter	80mm
Ceiling Depth	130mm

Accessories

M249 constant	14° 50W 12V Lamp
M250 constant	27° 50W 12V Lamp
M258 constant	40° 50W 12V Lamp
M280 constant	55° 50W 12V Lamp
ET4632.SP PRE	60W 12V Transformer
03204 (DLC4)	Firehood 1 hour rated



Available Finishes

- white (DL331/B WHT)
- nickel (DL331/B NKL)



Contract 50  
recessed low voltage downlight

- This fixed downlight has no visible lamp retainer.
- It is available in a variety of finishes for any taste.
- Twisting locking ring for easy change of lamps.

Lampholder	GU5.3
Max Wattage	50W
Voltage	12V
IP Rating	IP20
Ceiling Cutout	75mm
Overall Diameter	82mm
Ceiling Depth	110mm

Accessories

M249 constant	14° 50W 12V Lamp
M250 constant	27° 50W 12V Lamp
M258 constant	40° 50W 12V Lamp
M280 constant	55° 50W 12V Lamp
ET4632.SP PRE	60W 12V Transformer
03204 (DLC4)	Firehood 1 hour rated



Available Finishes

- white (DL337 WHITE)
- black (DL337 BLACK)
- chrome (DL337 CHROME)
- bronze (DL337 BRONZE)
- brass (DL337 BRASS)
- nickel (DL337 NICKEL)



Contract 35  
recessed low voltage downlight

- This fixed downlight has no visible lamp retainer.
- It is available in a variety of finishes for any taste.
- Twisting locking ring for easy change of lamps.

Lampholder	GU4
Max Wattage	20W
Voltage	12V
IP Rating	IP20
Ceiling Cutout	46mm
Overall Diameter	57mm
Ceiling Depth	75mm

Accessories

M252B	Halogen 35mm 20W 10°
M262B	Halogen 35mm 20W 26°
ET462	60W 12V Transformer
03204 (DLC4)	Firehood 1 hour rated



Available Finishes

- white (DL3205 WHITE)
- black (DL3205 BLACK)
- chrome (DL3205 CHROME)
- bronze (DL3205 BRONZE)
- brass (DL3205 BRASS)
- nickel (DL3205 NICKEL)



Contract Tilt  
recessed low voltage downlight

- The contract Tilt is a downlight with no visible lamp retainer.
- It is available in a variety of finishes for any taste.
- It has a 30 degree tilt with a full 360 degree rotation.

Lampholder	GU5.3
Max Wattage	50W
Voltage	12V
IP Rating	IP20
Ceiling Cutout	80mm
Overall Diameter	95mm
Ceiling Depth	110mm
Vertical Tilt	30°

Accessories

M249 constant	14° 50W 12V Lamp
M250 constant	27° 50W 12V Lamp
M258 constant	40° 50W 12V Lamp
M280 constant	55° 50W 12V Lamp
EET4632.SP PRE	60W 12V Transformer
03204 (DLC4)	Firehood 1 hour rated



Available Finishes

- white (DL339 WHITE)
- black (DL339 BLACK)
- chrome (DL339 CHROME)
- bronze (DL339 BRONZE)
- brass (DL339 BRASS)
- nickel (DL339 NICKEL)



Compasso Single  
recessed low voltage downlight

- The compasso downlight can take either a low voltage dichroic 25mm lamp or a LED component allowing colour.
- Designed with easy lamp change.
- It has a 30 degree tilt with a full 360 degree rotation.

Lampholder	GU 4
Max Wattage	20W
Voltage	12V
IP Rating	IP20
Ceiling Cutout	45mm
Overall Diameter	57mm
Ceiling Depth	126mm
Vertical Tilt	20°
Horizontal Rotation	360°

Accessories

M820 NARROW	Halogen 25mm 20W 8°
GU4	
M820 WIDE	Halogen 25mm 20W 23°
GU4	
ET4632.SP PRE	60W 12V Transformer
03204 (DLC4)	Firehood 1 hour rated



Available Finishes

- white (COMPASSO 11)
- nickel (COMPASSO 16)



Compasso Double  
recessed low voltage downlight

- The compasso downlight can take either a low voltage dichroic 25mm lamp or a LED component allowing colour.
- Designed with easy lamp change.
- It has a 30 degree tilt with a full 360 degree rotation.

Lampholder	GU 4
Max Wattage	2 x 20W
Voltage	12V
IP Rating	IP20
Ceiling Cutout	113mm
Overall Diameter	126mm
Ceiling Depth	120mm
Vertical Tilt	20°
Horizontal Rotation	360°

Accessories

M820 NARROW	Halogen 25mm 20W 8°
GU4	
M820 WIDE	Halogen 25mm 20W 23°
GU4	
ET4632.SP PRE	60W 12V Transformer
03204 (DLC4)	Firehood 1 hour rated



Available Finishes

- white (COMPASSO 21)
- nickel (COMPASSO 26)



Compasso Triple  
recessed low voltage downlight

- The compasso downlight can take either a low voltage dichroic 25mm lamp or a LED component allowing colour.
- Designed with easy lamp change.
- It has a 30 degree tilt with a full 360 degree rotation.

Lampholder	GU 4
Max Wattage	3 x 20W
Voltage	12V
IP Rating	IP20
Ceiling Cutout	113mm
Overall Diameter	126mm
Ceiling Depth	120mm
Vertical Tilt	20°
Horizontal Rotation	360°

Accessories

M820 NARROW	Halogen 25mm 20W 8°
GU4	
M820 WIDE	Halogen 25mm 20W 23°
GU4	
ET4632.SP PRE	60W 12V Transformer
03204 (DLC4)	Firehood 1 hour rated



Available Finishes

- white (COMPASSO 31)
- nickel (COMPASSO 36)





Trimless FRT-100-MR16 or QR-70 recessed low voltage downlight

- This downlight comes with a frame that allows it to be plastered flush to the ceiling creating a contemporary minimal style.
- Each downlight can be tilted and rotated throughn 45° allowing the light to be directed where needed.

Lamp	MR-16	QR-70
Lampholder	GU5.3	B15d
Max Wattage	50W	50W
Voltage	12V	12V
Cutout Width	112mm	112mm
Cutout Length	112mm	112mm
Width	102mm	102mm
Length	102mm	102mm
Depth	91mm	91mm
Beam Angle	24°	12°
Horizontal Rotation	45°	45°
Vertical Tilt	45°	45°
Accessories		

MR16 Lamps	
M249 constant	14° 50W 12V Lamp
M250 constant	27° 50W 12V Lamp
M258 constant	40° 50W 12V Lamp
M280 constant	55° 50W 12V Lamp
QR-70 Lamps	
M157 OS	Bar Lamp (SBC) 50W 8°
M158 OS	Bar Lamp (SBC) 50W 24°
ET4632.SP PRE	60W 12V Transformer
FRT100 MR16 HOOD	Fire Hood 190mm X 190mm 125H



Available Finishes

- black MR-16 (FRT100 MR16 BLK)
- white MR-16 (FRT100 MR16 WHT)
- black QR70 (FRT100 QR70 BLK)
- white QR70 (FRT100 QR70 WHT)



Trimless FRT-200-MR16 or QR-70 recessed low voltage downlight

- This downlight comes with a frame that allows it to be plastered flush to the ceiling creating a contemporary minimal style.
- Each downlight can be tilted and rotated throughn 45° allowing the light to be directed where needed.

Lamp	MR-16	QR-70
Lampholder	GU5.3	B15d
Max Wattage	2 x 50W	2 x 50W
Voltage	12V	12V
Cutout Width	112mm	112mm
Cutout Length	220mm	220mm
Width	102mm	102mm
Length	213mm	213mm
Depth	91mm	91mm
Beam Angle	24°	12°
Horizontal Rotation	45°	45°
Vertical Tilt	45°	45°
Accessories		

MR16 Lamps	
M249 constant	14° 50W 12V Lamp
M250 constant	27° 50W 12V Lamp
M258 constant	40° 50W 12V Lamp
M280 constant	55° 50W 12V Lamp
QR-70 Lamps	
M157 OS	Bar Lamp (SBC) 50W 8°
M158 OS	Bar Lamp (SBC) 50W 24°
ET4632.SP PRE	60W 12V Transformer
FRT100 MR16 HOOD	Fire Hood 190mm X 190mm 125H



Available Finishes

- black MR-16 (FRT200 MR16 BLK)
- white MR-16 (FRT200 MR16 WHT)
- black QR70 (FRT200 QR70 BLK)
- white QR70 (FRT200 QR70 WHT)



Trimless FRT-200-MR16 or QR-70 recessed low voltage downlight

- This downlight comes with a frame that allows it to be plastered flush to the ceiling creating a contemporary minimal style.
- Each downlight can be tilted and rotated throughn 45° allowing the light to be directed where needed.

Lamp	MR-16	QR-70
Lampholder	GU5.3	B15d
Max Wattage	3 x 50W	3 x 50W
Voltage	12V	12V
Cutout Width	112mm	112mm
Cutout Length	316mm	316mm
Width	102mm	102mm
Depth	307mm	213mm
Length	91mm	91mm
Beam Angle	24°	12°
Horizontal Rotation	45°	45°
Vertical Tilt	45°	45°
Accessories		

MR16 Lamps	
M249 constant	14° 50W 12V Lamp
M250 constant	27° 50W 12V Lamp
M258 constant	40° 50W 12V Lamp
M280 constant	55° 50W 12V Lamp
QR-70 Lamps	
M157 OS	Bar Lamp (SBC) 50W 8°
M158 OS	Bar Lamp (SBC) 50W 24°
ET4632.SP PRE	60W 12V Transformer
FRT100 MR16 HOOD	Fire Hood 190mm X 190mm 125H



Available Finishes

- black MR-16 (FRT300 MR16 BLK)
- white MR-16 (FRT300 MR16 WHT)
- black QR70 (FRT300 QR70 BLK)
- white QR70 (FRT300 QR70 WHT)



Trimless FRT-200-MR16 or QR-70 recessed low voltage downlight

- This downlight comes with a frame that allows it to be plastered flush to the ceiling creating a contemporary minimal style.
- Each downlight can be tilted and rotated throughn 45° allowing the light to be directed where needed.

Lamp	MR-16	QR-70
Lampholder	GU5.3	B15d
Max Wattage	4 x 50W	4 x 50W
Voltage	12V	12V
Cutout Width	213mm	213mm
Cutout Length	213mm	213mm
Width	205mm	205mm
Depth	91mm	91mm
Length	205mm	205mm
Beam Angle	24°	12°
Horizontal Rotation	45°	45°
Vertical Tilt	45°	45°
Accessories		

MR16 Lamps	
M249 constant	14° 50W 12V Lamp
M250 constant	27° 50W 12V Lamp
M258 constant	40° 50W 12V Lamp
M280 constant	55° 50W 12V Lamp
QR-70 Lamps	
M157 OS	Bar Lamp (SBC) 50W 8°
M158 OS	Bar Lamp (SBC) 50W 24°
ET4632.SP PRE	60W 12V Transformer
FRT100 MR16 HOOD	Fire Hood 190mm X 190mm 125H



Available Finishes

- black MR-16 (FRT400 MR16 BLK)
- white MR-16 (FRT400 MR16 WHT)
- black QR70 (FRT400 QR70 BLK)
- white QR70 (FRT400 QR70 WHT)



Trimless FRT-100-QR111 recessed low voltage downlight

- This downlight comes with a frame that allows it to be plastered flush to the ceiling creating a contemporary minimal style.
- Each downlight can be tilted and rotated throughn 45° allowing the light to be directed where needed.

Lamp	QR-111
Lampholder	G53
Max Wattage	75W
Voltage	12V
Cutout Width	167mm
Cutout Length	167mm
Fitting Length	160mm
Fitting Width	160mm
Fitting Depth	104mm
Beam Angle	10°
Horizontal Rotation	45°
Vertical Tilt	45°
Accessories	

M161 GE	Bar Lamp (G53) 50W 24°
M162 GE	Bar Lamp (G53) 75W 24°
ET4632	60W 12V Transformer
ET105P	105W 12V Transformer

FRT100	Fire Hood 245mm X
QR111HOOD	245mm 130H



Available Finishes

- black (FRT100 QR111)



Trimless FRT-200-QR111 recessed low voltage downlight

- This downlight comes with a frame that allows it to be plastered flush to the ceiling creating a contemporary minimal style.
- Each downlight can be tilted and rotated throughn 45° allowing the light to be directed where needed.

Lamp	QR-111
Lampholder	G53
Max Wattage	2 x 75W
Voltage	12V
Cutout Width	167mm
Cutout Length	320mm
Fitting Length	313mm
Fitting Width	160mm
Fitting Depth	104mm
Beam Angle	10°
Horizontal Rotation	45°
Vertical Tilt	45°
Accessories	

M161 GE	Bar Lamp (G53) 50W 24°
M162 GE	Bar Lamp (G53) 75W 24°
ET4632	60W 12V Transformer
ET105P	105W 12V Transformer

FRT200	Fire Hood 395mm X
QR111HOOD	245mm 130H



Available Finishes

- black (FRT200 QR111)



Trimless FRT-300-QR111 recessed low voltage downlight

- This downlight comes with a frame that allows it to be plastered flush to the ceiling creating a contemporary minimal style.
- Each downlight can be tilted and rotated throughn 45° allowing the light to be directed where needed.

Lamp	QR-111
Lampholder	G53
Max Wattage	3 x 75W
Voltage	12V
Cutout Width	167mm
Cutout Length	477mm
Fitting Length	470mm
Fitting Width	160mm
Fitting Depth	104mm
Beam Angle	10°
Horizontal Rotation	45°
Vertical Tilt	45°
Accessories	

M161 GE	Bar Lamp (G53) 50W 24°
M162 GE	Bar Lamp (G53) 75W 24°
ET4632	60W 12V Transformer
ET105P	105W 12V Transformer

FRT300	Fire Hood 545mm X
QR111HOOD	245mm 130H



Available Finishes

- black (FRT300 QR111)



Trimless FRT-400-QR111 recessed low voltage downlight

- This downlight comes with a frame that allows it to be plastered flush to the ceiling creating a contemporary minimal style.
- Each downlight can be tilted and rotated throughn 45° allowing the light to be directed where needed.

Lamp	QR-111
Lampholder	G53
Max Wattage	4 x 75W
Voltage	12V
Cutout Width	330mm
Cutout Length	330mm
Fitting Length	320mm
Fitting Width	320mm
Fitting Depth	104mm
Beam Angle	10°
Horizontal Rotation	45°
Vertical Tilt	45°
Accessories	



M161 GE	Bar Lamp (G53) 50W 24°
M162 GE	Bar Lamp (G53) 75W 24°
ET4632	60W 12V Transformer
ET105P	105W 12V Transformer

FRT400	Fire Hood 405mm X
QR111HOOD	405mm 130H



Available Finishes

- black (FRT400 QR111)







**Grid Single**  
recessed low voltage downlight

- The grid downlight has a unique design with each downlight mounted in a square or rectangle.
- Each downlight has a tilt of 45 degrees on 2 axis allowing it to highlight any part of the room.

Lampholder	GU5.3
Max Wattage	50W
Voltage	12V
IP Rating	IP20
Cutout Width	110mm
Cutout Length	110mm
Fitting Length	125mm
Fitting Width	125mm
Fitting Depth	100mm
Vertical Tilt	45°
Horizontal rotation	45°

Accessories

M249 constant	14° 50W 12V Lamp
M250 constant	27° 50W 12V Lamp
M258 constant	40° 50W 12V Lamp
M280 constant	55° 50W 12V Lamp
ET4632.SP PRE	60W 12V Transformer
FRT100 MR16	Fire Hood 1HR
HOOD	190mm X 190mm 125H



- Available Finishes
- white (EL2070004 WHITE)
  - silver (EL2070004 SILVER)



**Grid Double**  
recessed low voltage downlight

- The grid downlight has a unique design with each downlight mounted in a square or rectangle.
- Each downlight has a tilt of 45 degrees on 2 axis allowing it to highlight any part of the room.

Lampholder	GU5.3
Max Wattage	2 x 50W
Voltage	12V
IP Rating	IP20
Cutout Width	110mm
Cutout Length	205mm
Fitting Length	220mm
Fitting Width	125mm
Fitting Depth	100mm
Vertical Tilt	45°
Horizontal rotation	45°

Accessories

M249 constant	14° 50W 12V Lamp
M250 constant	27° 50W 12V Lamp
M258 constant	40° 50W 12V Lamp
M280 constant	55° 50W 12V Lamp
ET4632.SP PRE	60W 12V Transformer
FRT200 MR16	Fire Hood 300mm X
HOOD	190mm 100H



- Available Finishes
- white (EL2071004 WHT)
  - silver (EL2071004 SILVER)



**Grid Triple**  
recessed low voltage downlight

- The grid downlight has a unique design with each downlight mounted in a square or rectangle.
- Each downlight has a tilt of 45 degrees on 2 axis allowing it to highlight any part of the room.

Lampholder	GU5.3
Max Wattage	3 x 50W
Voltage	12V
IP Rating	IP20
Cutout Width	110mm
Cutout Length	300mm
Fitting Length	310mm
Fitting Width	125mm
Fitting Depth	100mm
Vertical Tilt	45°
Horizontal rotation	45°

Accessories

M249 constant	14° 50W 12V Lamp
M250 constant	27° 50W 12V Lamp
M258 constant	40° 50W 12V Lamp
M280 constant	55° 50W 12V Lamp
ET4632.SP PRE	60W 12V Transformer
FRT300 MR16	Fire Hood 312X110mm
HOOD	100H



- Available Finishes
- white (EL2072004W WHITE)
  - silver (EL2072004S SLV)



**Grid Quadruple**  
recessed low voltage downlight

- The grid downlight has a unique design with each downlight mounted in a square or rectangle.
- Each downlight has a tilt of 45 degrees on 2 axis allowing it to highlight any part of the room.

Lampholder	GU5.3
Max Wattage	4 x 50W
Voltage	12V
IP Rating	IP20
Cutout Width	110mm
Cutout Length	205mm
Fitting Length	220mm
Fitting Width	220mm
Fitting Depth	100mm
Vertical Tilt	45°
Horizontal rotation	45°

Accessories

M249 constant	14° 50W 12V Lamp
M250 constant	27° 50W 12V Lamp
M258 constant	40° 50W 12V Lamp
M280 constant	55° 50W 12V Lamp
ET4632.SP PRE	60W 12V Transformer
FRT400 MR16	Fire Hood 290mm X
HOOD	290mm 100H



- Available Finishes
- white (EL2073004 WHITE)
  - silver (EL2073004 SILVER)



**Single Bar Lamp**  
recessed low voltage downlight

- Unique design with each downlight mounted in a square or rectangle.
- Each downlight has a tilt of 45 degrees on 2 axis to highlight any part of the room.
- Anti glare lamp gives soft controlled light.

Lampholder	GU53
Max Wattage	75W
Voltage	12V
IP Rating	IP20
Cutout Width	150mm
Cutout Length	150mm
Fitting Length	170mm
Fitting Width	170mm
Fitting Depth	100mm
Vertical Tilt	45°

Accessories

M161 GE	AR111 Bar Lamp (G53) 50W 24°
M162 GE	AR111 Bar Lamp (G53) 75W 24
ET4632.SP PRE	60W 12V Transformer
FRT100	Fire Hood 245mm X
QR111HOOD	245mm 130H



- Available Finishes
- white (EL2060005 WHITE)
  - silver (EL2060005 SILVER)



**Double Bar Lamp**  
recessed low voltage downlight

- Unique design with each downlight mounted in a square or rectangle.
- Each downlight has a tilt of 45 degrees on 2 axis to highlight any part of the room.
- Anti glare lamp gives soft controlled light.

Lampholder	GU53
Max Wattage	2 x 75W
Voltage	12V
IP Rating	IP20
Cutout Width	145mm
Cutout Length	285mm
Fitting Length	297mm
Fitting Width	160mm
Fitting Depth	100mm
Vertical Tilt	45°

Accessories

M161 GE	AR111 Bar Lamp (G53) 50W 24°
M162 GE	AR111 Bar Lamp (G53) 75W 24
ET4632.SP PRE	60W 12V Transformer
FRT200	Fire Hood 395mm X
QR111HOOD	245mm 130H



- Available Finishes
- white (EL2061005 WHITE)
  - silver (EL2061005 SILVER)



**Triple Bar Lamp**  
recessed low voltage downlight

- Unique design with each downlight mounted in a square or rectangle.
- Each downlight has a tilt of 45 degrees on 2 axis to highlight any part of the room.
- Anti glare lamp gives soft controlled light.

Lampholder	GU53
Max Wattage	3 x 75W
Voltage	12V
IP Rating	IP20
Cutout Width	145mm
Cutout Length	415mm
Fitting Length	428mm
Fitting Width	160mm
Fitting Depth	100mm
Vertical Tilt	45°

Accessories

M161 GE	AR111 Bar Lamp (G53) 50W 24°
M162 GE	AR111 Bar Lamp (G53) 75W 24
ET4632.SP PRE	60W 12V Transformer
FRT300	Fire Hood 545mm X
QR111HOOD	245mm 130H



- Available Finishes
- white (EL2062005 WHT/BL)
  - silver (EL2062005 SILVER)



**Quadruple Bar Lamp**  
recessed low voltage downlight

- Unique design with each downlight mounted in a square or rectangle.
- Each downlight has a tilt of 45 degrees on 2 axis to highlight any part of the room.
- Anti glare lamp gives soft controlled light.

Lampholder	GU53
Max Wattage	4 x 75W
Voltage	12V
IP Rating	IP20
Cutout Width	145mm
Cutout Length	285mm
Fitting Length	300mm
Fitting Width	290mm
Fitting Depth	100mm
Vertical Tilt	45°

Accessories

M161 GE	AR111 Bar Lamp (G53) 50W 24°
M162 GE	AR111 Bar Lamp (G53) 75W 24
ET4632.SP PRE	60W 12V Transformer
FRT400	Fire Hood 405mm x
QR111HOOD	405mm



- Available Finishes
- white (EL2063005 WHITE)
  - silver (EL2063005 SILVER)



Low Voltage



**Fire Rated 12V Adjustable Downlight**  
recessed low voltage downlight

- This fitting is a 90 minute fire rated downlight, it does not require a firehood.
- It has a black baffle to reduce glare, giving a softer light.

Lampholder	GX5.3
Max Wattage	50W
Voltage	12V
IP Rating	IP20
Cut Out	83mm
Ceiling Depth	98mm
Diameter	96mm
Vertical Tilt	30°
Horizontal Rotation	360°

Accessories

M249 constant	14° 50W 12V Lamp
M250 constant	27° 50W 12V Lamp
M258 constant	40° 50W 12V Lamp
M280 constant	55° 50W 12V Lamp
ET4632	60W 12V Transformer



Available Finishes

- 12V adjustable white (FIRE DH20101A WH)
- 12V adjustable stainless steel (FIRE DH20101A SN)
- 12V adjustable chrome (FIRE DH20101A CH)

Mains Voltage



**Fire Rated Adjustable 240V Downlight**  
recessed mains voltage downlight

- This fitting is a 90 minute fire rated downlight, it does not require a firehood.
- It has a black baffle to reduce glare, giving a softer light.

Lampholder	GU10
Max Wattage	50W
Voltage	240V
IP Rating	IP20
Cut Out	83mm
Ceiling Depth	98mm
Diameter	96mm
Vertical Tilt	30°
Horizontal Rotation	360°

Accessories

PAR16F	Halogen GU10 50mm
SUPERIA50	50W 50°
PAR16F	Halogen GU10 50mm
SUPERIA35	35W 25°



Available Finishes

- 240V adjustable white (FIRE DH24101A WH)
- 240V adjustable stainless steel (FIRE DH24101A SN)
- 240V adjustable Chrome (FIRE DH24101A CH)

Part L



**LED Fixed Fire Rated Downlight**  
energy saving lighting

- This fitting has a LED Lamp life of 50000 hours so little to no maintenance is required
- This fire rated downlight is also part L compliant.

Lampholder	LED
Maximum Wattage	3W
Ceiling Cut Out	83mm
Ceiling Depth	96mm
Overall Diameter	96mm
IP Rating	IP20
Amperage	350mA

Accessories

BULL 350mA 6W	LED Driver White
	6W 350mA



Available Finishes

- cool fixed (FIRE DHLEDF COOL)
- warm fixed (FIRE DHLEDF WARM)

Part L



**LED Adjustable Fire Rated Downlight**  
energy saving lighting

- This fitting has a LED Lamp life of 50000 hours so little to no maintenance is required
- This fire rated downlight is also part L compliant.

Lampholder	LED
Maximum Wattage	3W
Ceiling Cut Out	83mm
Ceiling Depth	96mm
Overall Diameter	96mm
IP Rating	IP20
Amperage	350mA
Vertical Tilt	30°
Horizontal Rotation	360°

Accessories

BULL 350mA 6W	LED Driver White
	6W 350mA



Available Finishes

- cool adjustable (FIRE DHLED COOL)
- warm adjustable (FIRE DHLED WARM)

Part L



**Delta Fluo**  
energy saving lighting

- The Delta Fluo is a square modern energy efficient downlight with frosted glass available in different finishes. It is deally suited for office and commercial applications.
- 2 x 13W 4-pin Compact Fluorescent lamps must be bought with this product.

Lampholder	G24q-1
Maximum Wattage	2 X 13W
Ceiling Cut Out	156mm
Ceiling Depth	100mm
Voltage	240V
IP Rating	IP40

Accessories

DDE13840	Compact Fluorescent
	13W G24q-1
	Warm White
DDE13827	Compact Fluorescent
	13W G24q-1
	Cool White



Available Finishes

- white (DL639201)
- stainless steel (DL639232)

Part L



**Professional 6160**  
energy saving lighting

- The Professional 6160 is a fixed downlight with an open reflector and built-in ballast.
- The 6160 Diffusers available separately, it can be used in conjunction with this fitting giving not only a diffused light but increasing the waterproof rating of the fitting to IP44.

Lampholder	G24d-1
Maximum Wattage	13W
Ceiling Cut Out	105mm
Ceiling Depth	160mm
Overall Diameter	120mm
Voltage	240V
IP Rating	IP20

Accessories

DD13840	Compact Fluorescent
	13W G24d-1
	Cool White
DD13827	Compact Fluorescent
	13W G24d-1
	Warm White
0284	6160 Diffuser Clear



Available Finishes

- white (DL616001)
- brass (DL616030)
- chrome (DL616031)



Contour Round  
energy saving lighting


The Contour Round is a high power Cree LED downlight that provides a strong vibrant light.

It can be tilted by 20 degrees to adjust the light direction. Ideal as a replacement for standard halogen lamp downlights which generally consume more power and produce more heat.

Fitting comes with a driver included.

Output Wattage	3 x 3W
Ceiling Cut Out	90mm
Ceiling Depth	35mm
Diameter	111mm
Beam Angle	45°
Vertical Tilt	20°
Current	700mA
IP Rating	IP54
Lumens	495
Lumens Per Watt	55
CRI	75

Accessories	
DC700mA 10W	LED Driver White 10W 700mA
LED36W 700	LED Driver Black 36W 700mA

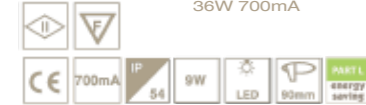

Available Finishes

- aluminium warm white (3100K) (LEDSY3WX3R A W/W)
- aluminium cool white (6700K) (LEDSY3WX3R A C/W)
- white, warm white (3100K) (LEDSY3WX3R W W/W)
- white, cool white (6700K) (LEDSY3WX3R W C/W)



Contour Square  
energy saving lighting

The Contour Square is a high power Cree LED downlight that provides a strong vibrant light.

It can be tilted by 20 degrees to adjust the light direction. Ideal as a replacement for standard halogen lamp downlights which generally consume more power and produce more heat.

Fitting comes with a driver included.

Output Wattage	3 x 3W
Ceiling Cut Out	90mm
Ceiling Depth	35mm
Width	112mm
Beam Angle	45°
Vertical Tilt	20°
Current	700mA
IP Rating	IP54
Lumens	495
Lumens Per Watt	55
CRI	80


Accessories	
DC700mA 10W	LED Driver White 10W 700mA
LED36W 700	LED Driver Black 36W 700mA



Available Finishes

- aluminium warm white (3100K) (LEDSY3WX3S A W/W)
- aluminium cool white (6700K) (LEDSY3WX3S A C/W)
- white, warm white (3100K) (LEDSY3WX3S W W/W)
- white, cool white (6700K) (LEDSY3WX3S W C/W)

Contour

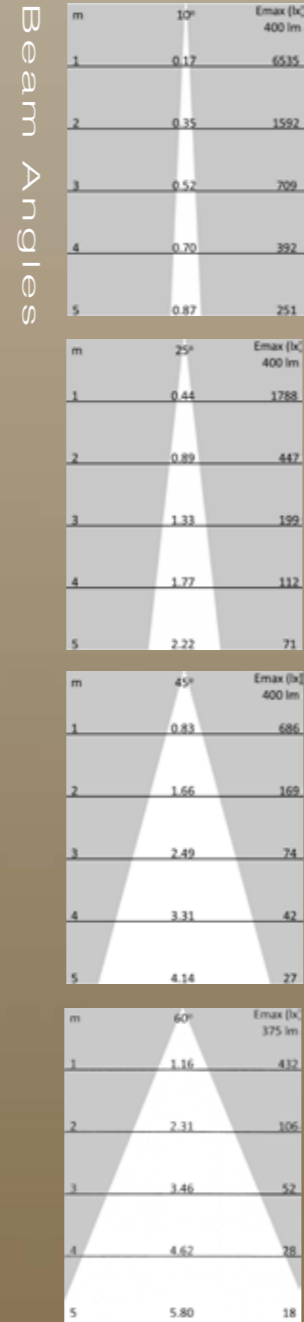

Beam Angles




Contour Round, Beam Angles  
energy saving lighting

The Contour Round is a high power Cree LED downlight that provides a strong vibrant light.

It can be tilted by 20 degrees to adjust the light direction. Ideal as a replacement for standard halogen lamp downlights which generally consume more power and produce more heat.

Output Wattage	3 x 3W
Ceiling Cut Out	90mm
Ceiling Depth	35mm
Diameter	111mm
Vertical Tilt	20°
Current	700mA
IP Rating	IP20
Lumens	410
Lumens Per Watt	46
CRI	80

Accessories	
DC700mA 10W	LED Driver White 10W 700mA
LED36W 700	LED Driver Black 36W 700mA



Available Finishes

- white, W/W, 10° beam angle (LEDSY3W3R 10D WW)
- white, W/W, 25° beam angle (LEDSY3W3R 25D WW)
- white, W/W, 45° beam angle (LEDSY3W3R 45D WW)
- white, W/W, 60° beam angle (LEDSY3W3R 60D WW)



Contour Square  
energy saving lighting

The Contour Square is a high power Cree LED downlight that provides a strong vibrant light.

It can be tilted by 20 degrees to adjust the light direction. Ideal as a replacement for standard halogen lamp downlights which generally consume more power and produce more heat.

Output Wattage	3 x 3W
Ceiling Cut Out	90mm
Ceiling Depth	35mm
Width	112mm
Vertical Tilt	20°
Current	700mA
IP Rating	IP20
Lumens	410
Lumens Per Watt	46
CRI	80

Accessories	
DC700mA 10W	LED Driver White 10W 700mA
LED36W 700	LED Driver Black 36W 700mA



Available Finishes

- white, W/W, 10° beam angle (LEDSY3WX3S 10D WW)
- white, W/W, 25° beam angle (LEDSY3WX3S 25D WW)
- white, W/W, 45° beam angle (LEDSY3WX3S 45D WW)
- white, W/W, 60° beam angle (LEDSY3WX3S 60D WW)



Spider LED Downlight  
energy saving lighting

The Spider is an LED downlight that is energy saving and conforms to Part L regulations. The fitting has 15 x 1W LEDs making it equivalent to a 140W mains lamp or 60W low voltage lamp.

It is installed flush with the ceiling so just the light source is visible, for a contemporary modern feel.

Output Wattage	15W
Ceiling Cut Out	145mm
Ceiling Depth	60mm
Width	112mm
Length	150mm
Current	350mA
IP Rating	IP20

Accessories	
LED18W 350	LED Driver 18W 350mA



Available Finishes

- white - cool white (DL7021 WHITE C/W)
- black - cool white (DL7021 BLACK C/W)
- white - warm white (DL7021 WHITE W/W)
- black - warm white (DL7021 BLACK W/W)



Nebula 3 x 1W  
energy saving lighting

The Nebula Triple 3 x 1 Watt is a triple LED downlight that has a life time of 50,000 hours.

Please note that this product can only be wired in series.

Output Wattage	3 x 1W
Ceiling Cut Out	70mm
Ceiling Depth	28mm
Depth	34mm
Diameter	80mm
Max Amperage	350mA
IP Rating	IP54

Accessories	
LED18W 350	LED Driver Black 18W
BULL 350mA 6W	LED Driver White 6W
DC350mA 10W	LED Driver White 10W
LED DRIVER 4W	Resistive Load Dimmable LED Driver White 4W 350mA



Available Finishes

- white, warm white (LEDSH10031W WARM)
- white, cool white (LEDSH10031W COOL)
- white, blue (LEDSH10031W BLUE)
- white, green (LEDSH10031W GRN)
- white, red (LEDSH10031W RED)
- white, yellow (LEDSH10031W YLW)



Nebula 3 x 3W  
energy saving lighting

The Nebula Triple 3 x 3 Watt is a triple LED downlight that has a life time of 50,000 hours.

Please note that this product can only be wired in series.

Output Wattage	3 x 3W
Ceiling Cut Out	70mm
Ceiling Depth	28mm
Depth	34mm
Diameter	80mm
Max Amperage	350mA
IP Rating	IP54

Accessories	
LED18W 350	LED Driver Black 18W
DC350mA 10W	LED Driver White 10W



Available Finishes

- nickel, warm white (LEDSH10033W WARM)
- nickel, cool white (LEDSH10033W COOL)
- nickel, blue (LEDSH10033W BLUE)