


## RECEIVER RGB CONTROLLING LED STRIP COMMON ANODE

**Product code:**

**WISE RGB LED 300 S**  
TVRGBD000ST24

3x4A Slave receiver

### 1 - Led wiring

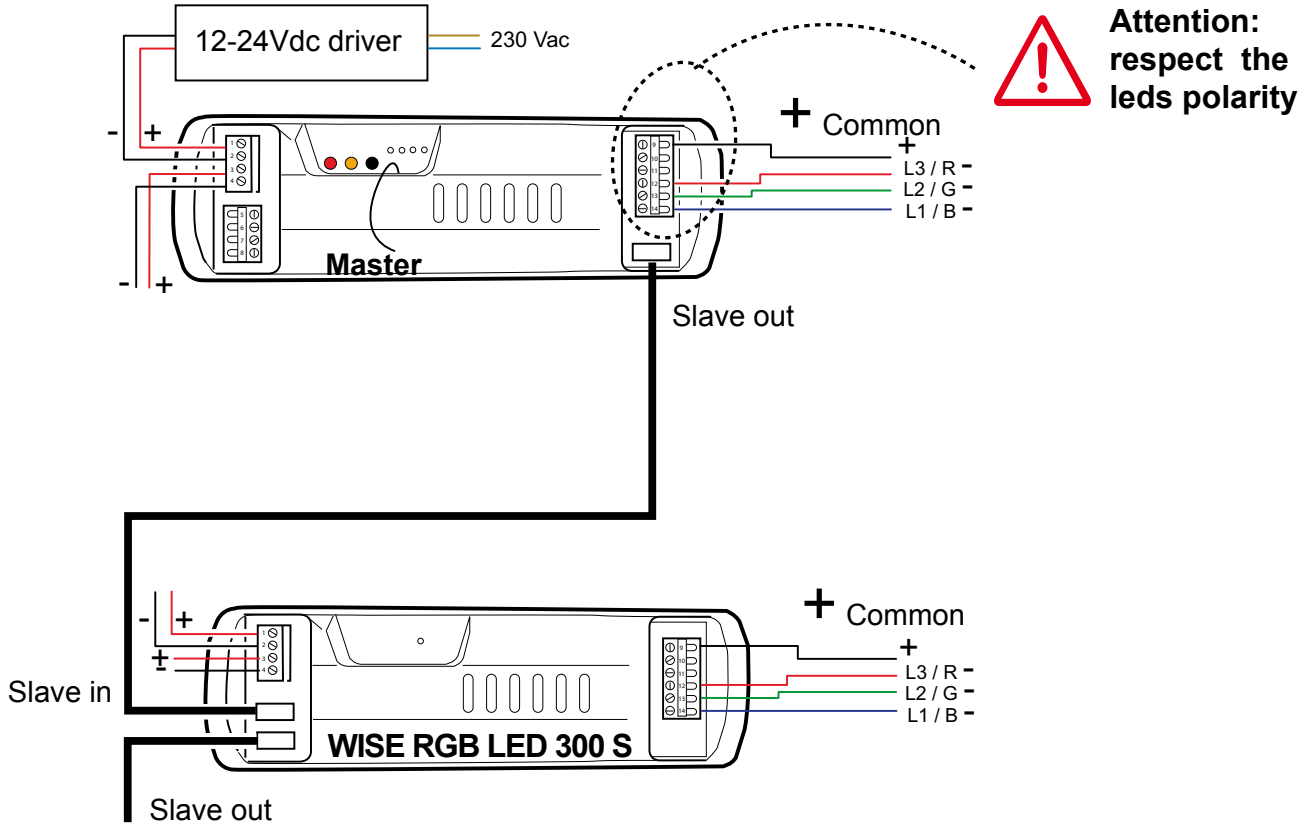

### Warning



Connect the power supplier and the LED RGB in a correct way to the receiver before connecting the power supplier to the electricity network.  
 A faulty connection of the LED diodes (polarity inversion) could damages them, therefore pay attention during their connection by respecting the polarity. The general power supply of the device has to be by a power supplier which can supply the power and tension needed.  
 At the power-on-reset the condition previous the turning-off will be resumed.  
 The product must not be enclosed or placed with insulating material such as glass wool, polystyrene or similar materials. Let the housing to be well-ventilated.  
 In the view of a constant development of their products, the manufacturer reserves the right for changing technical data and features without prior notice.

### TECHNICAL SPECIFICATIONS

-Power supply	12 Vdc to 24 Vdc	-Operating temperature range	-20° - +60°C
-Max. power for each output	3 x 4A		
-Cable sections in input and output	1,5 mm <sup>2</sup>		

Code Number:

WISE RGB LED 300 S

Model number

T314.02

03/02/2011